


PLAN

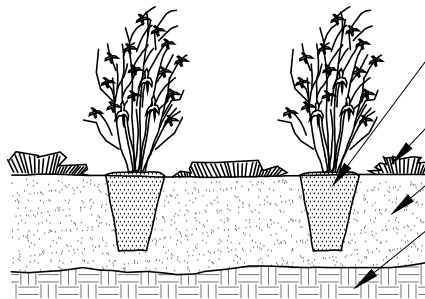

PLUG OR CONTAINER PLANT,  
SEE SCHEDULE FOR SPACING

PLUG OR CONTAINER PLANT  
MULCH: ONE INCH DEPTH. DO NOT ALLOW  
MULCH TO TOUCH BASE OF PLANT  
TOPSOIL

UNCOMPACTED SUBGRADE

**NOTES**

1. DIP ROOTS INTO WATER ABSORBENT GEL IMMEDIATELY BEFORE PLANTING.
2. SEPARATE AND SPREAD OUT ANY POT-BOUND ROOTS.
3. UTILIZE URBAN-TOLERANT, PRIMARILY NATIVE TREES, SHRUBS, AND PERENNIALS. CONSIDER CLIMATE CHANGE IN SPECIES SELECTION.

**PLUG AND CONTAINER PLANTING: SECTION**

SCALE: 1"=1'-0"

**CSI 32 92 00 - 4**  
**PLANTING - PERENNIALS**  
LANDSCAPE STANDARDS

PRIOR TO CONSTRUCTION, CONFIRM LAYOUT, DIMENSIONS, ADJACENT UTILITIES AND FINAL MATERIALS WITH U OF P OFFICE OF THE UNIVERSITY ARCHITECT. THIS DETAIL TO BE USED AS A GUIDE ONLY. SPECIFIC REVISIONS FOR SITE CONDITIONS AND INTENT ARE THE RESPONSIBILITY OF THE INDIVIDUAL PROJECT DESIGNER.